

# TECHNICAL DRAWING

Fold down ladder with ceiling ladder and hatch guardrail kit





## DETAILS

- Lower rung may vary up to 300mm compared with consecutive rungs
- Fold down ladders do not relate to any specific Australian Standards
- The ceiling ladder must be installed at 75 degrees
- Fall Protection may be required to protect the operator once in the ceiling area
- Hatch fall protection and grabrails must be provided
- Installation to be in accordance with manufactures requirements
- Code LD461 / GW394

VISIT [anchorsafe.com.au](http://anchorsafe.com.au) for

- more information
- real projects & case studies
- the latest height safety news, articles and industry updates

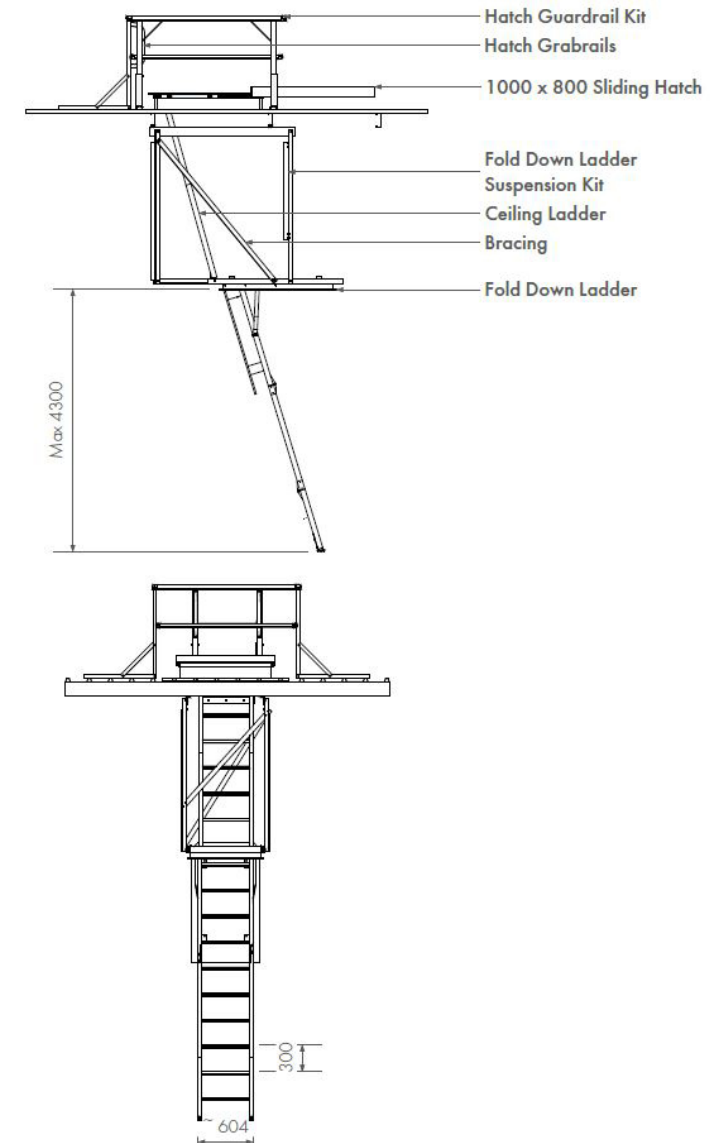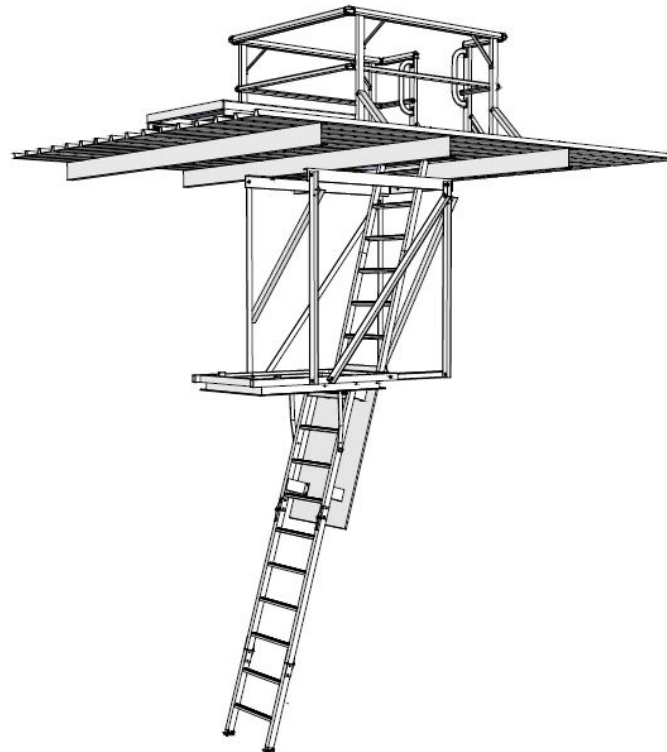

## Let's talk

Talk to us today about a total care approach to height safety:

☎ 1300 475 186 ✉ [sales@anchorsafe.com.au](mailto:sales@anchorsafe.com.au)